

Model RCDL Register

Mechanical Register
Non-Resettable

Technical Brief

GENERAL


Well proven basic totalizer used for inventory and process control where totalization is the only functional need of the product.

OPERATION


The model RCDL register is available on RCDL disc meters and Industrial Turbo meters. The standard RCDL Register for the RCDL disc meters is designed for metering liquids up to 120° F and is available in several units of measure. On the Industrial Turbo meters, the register is designed to meter liquids up to 250° F. These higher temperature units are available in U.S. gallons for both style meters, liters for disc meters, and cubic meters for Industrial Turbo meters. If the higher temperature register is selected for use on the RCDL disc meter, the appropriate higher temperature rated disc meter option must be used.



Optional 250° F Dial Face




Model 25 nutating disc meter with standard dial face in U.S. gallons




2" Industrial Turbo meter dial face in U.S. gallons

FEATURES

- Register Temperature Ratings:
RCDL Disc: Standard 120° F, Optional 250° F
Industrial Turbo: 250° F
- 6 digit non-resettable totalizer
- Weight: 3 lbs.

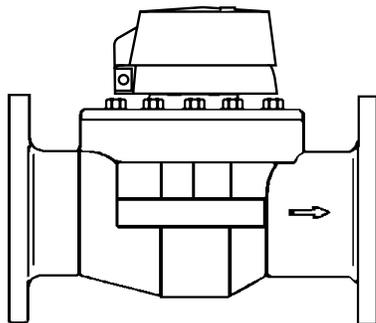

RCDL (Register) shown on Turbo meter

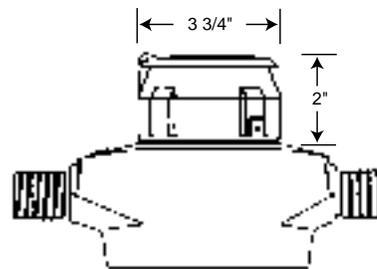

RCDL (Register) shown on Disc meter

ITB-104-02

7-01



Please see our website at
www.badgermeter.com
for specific regions and contacts.



BadgerMeter, Inc.

P.O. Box 245036, Milwaukee, WI 53224-9536
Telephone: (414) 355-0400 / (877) 243-1010
Fax: (414) 355-7499 / (866) 613-9305
www.badgermeter.com